

5 MEGA IP OUTDOOR IR CAMERA


EDWYUC-H7988 EDWYUC-H7988-WI

Feature

- 5 Mega pixel high resolution
- H.264/MPEG-4/M-JPEG triple streams
- Up to 32G SD card recording for alarm trigger & network outage
- ICR built in / Day&Night Switch time control
- 2-way audio / Cable management bracket with 3-Axis install
- Mobile view support
- Digital Wide Dynamic Range / Shutter Speed adjustment
- PoE Support
- IP66
- WIFI (optional)



Server	Compression	Triple streams : H.264/MPEG-4/JPEG
	Pixel (H x V)	2592x1944 / 2048x1536 / 1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Traffic Control	32/48/64/96/128/192/256/320/384/448/512/576/640/704/768Kbps 1/1.5/2/2.5/3/3.5/4/5/6/7/8/9/10Mbps
	Max. Frame Rate	(20fps)2048x1536, (15fps)2592x1944 (30fps)1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Safety	User-ID and password
	Protocols	Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 DNS / DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filetering
	Number of User	Max. 10 connections for singal video
	Storage Capacity	Micro SD card / FTP / NAS(Samba)
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre (0,1,2,3,4,5)/ Post(0,1,2,3,4,5,10) seconds
Release for alarm	Motion detection/ I/O / schedule	
Network Camera	Image Sensor	1/3.2" 5 Megapixel CMOS sensor
	D-WDR	Off (1~8 level)
	Shutter Time	outdoor / indoor/ (1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Video Output	BNC (1Vp-p, 75 Ohms)
	Min Illum	1.5 Lux(color) / 1.0 Lux(B/W)
	Optical Lens	3 ~ 9mm / F1.8
	IR LED / Range	35pcs / 25M
	Day / Night	Light Senso Mode / Color Mode(Day) / B/W Mode(Night) / Times Mode / Synchronize with DI input
Audio	Audio	2-way-halfduplex
	Audio Compression	G.711(64Kbps) / G.726(24Kbps) / G.726(32Kbps)
	Adjust Volume	Mic-in / Line-out web adjustable
	Audio In	3.5mm phone jack
	Audio Out	3.5mm phone jack (support 2 way)
Terminal	Network Interface	Ethernet(10Base-T/100Base-Tx) / PoE / 802.11(b/g/n)
	Video Interface	BNC, Video composit (NTSC/PAL)
	External Port	DI / DO
	SD Card	Micro SD Card (up tp 32GB)
General	Operation Voltage	DC 12V Max: 6.48W(IR On) PoE Max: 802.3af, 8.16W (IR on)
	Dimen./Weight	(φ)77mm * H180mm @ 1100g / 10pcs per carton
	Operation Temp.	-10 ~ +45
	Waterproof	IP66

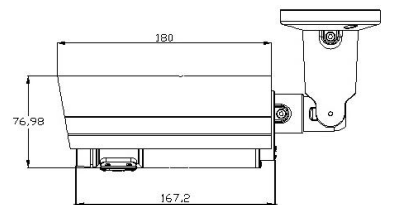

External zoom/Focus adjustment



External SD card slot with cover
(add rubber for waterproof)

Certificate : CE , FCC , RoHS

*No SD card slot & local storage function for Argentina



YUK-D06 Junction Box(option)