

# 3M NETWORK MINI VANDAL DOME CAMERA


## EDWYUC-HK27

### Feature

- Ultra compact size & easy operation
- H.264/ MPEG-4 JPEG triple codec
- Micro SD card for sudden network outage oalarm recording
- DI/DO for external alarm application
- Metal vandal water proof for excellenbutdoor installation
- Mobile surveillance
- PoE standard
- D-WDR
- ONVIF compliant



Server	Compression	Triple streams : H.264/MPEG-4/JPEG
	Pixel (H x V)	2048x1536 / 1920x1080 / 1280x720 / 640x480 / 320x240 / 176x144
	Traffic Control	32/48/64/96/128/192/256/320/384/448/512/576/640/704/768Kbps 1/1.5/2/2.5/3/3.5/4/5/6/7/8/9/10Mbps
	Max. Frame Rate	(15fps)2048x1536 (25fps)1920x1080
	Safety	User-ID and password
	Protocols	Ipv4/v6 / HTTP / HTTPS / QoS Layer 3 level / FTP / SMTP / Bonjour / UPnP / SNMPv1/v2c/v3 /DNS /DDNS / NTP / RTSP / RTP / UDP / IEEE 802.1x / DHCP / Access list filtering
	Number of User	Max. 10 connections for singal video
	Storage Capacity	Micro SD / FTP / NAS (Samba)
	Alerting	SMTP / FTP / HTTP / Micro SD
	Pre / Post Alarm	Pre (0,1,2,3,4,5)/ Post (0,1,2,3,4,5,10) seconds
Release for alarm	Motion detection/ I/O / schedule	
Network Camera	Image Pick-up Device	1/3" 3 Megapixel CMOS sensor
	D-WDR	Off & (1~8 level)
	Shutter Time	outdoor / indoor / 1/30 , 1/50 , 1/60 , 1/100 , 1/125 , 1/250 , 1/500 , 1/1000
	Video Output	--
	Optical Lens	3.6mm / F1.6
Terminal	Network Interface	Ethernet (10Base-T/100Base-Tx) / PoE
	External Port	DI / DO
	SD Card	Micro SD (up tp 32GB)
General	Operation Voltage	12V DC : max.2.4W PoE(802.3af above) 2.8W
	Dimen./Weight	(φ)80mm x (H)67mm @ 310g
	Operation Temp.	-10 ~ +45 ,

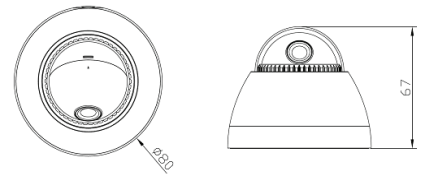

ultra compact size



additional dock for multiple installation use

Certificate : CE , FCC , RoHS